


Model No	Gauge	Liner Material	Coating Material	Color	Sizes	Length	Weight/pair
DY1850NM/NR	18	HPPE+Steel fiber /TANK-AMOUR™ Needle resistant material	3/4 crinkle latex coating	Grey/Black	7-12	23-28cm	



Features:

- Super strong liner provides high cut resistant ,CE ISO 13997 cut F, ANSI cut A9
- **Both Fingers & Palm, ANSI Needle resistant level A5**
- Crinkle latex palm coating provides superior grip,puncture resistance
- Special knit provides high wearer comfort
- Knit wrist helps prevent dirt and debris from entering the glove
- Washable


EN 388:2016

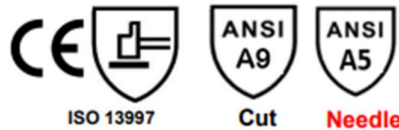

IDEAL APPLICATION

- * Glass manufacturing
- * Aeronautics & automotive
- * Steel industry
- * Construction and Mining
- * Assembling metal parts and components
- * Handling sharp or irregular-edged metal parts
- * Plastics injection and moulding
- * Oil & gas industry

CERTIFICATION LEGENDS

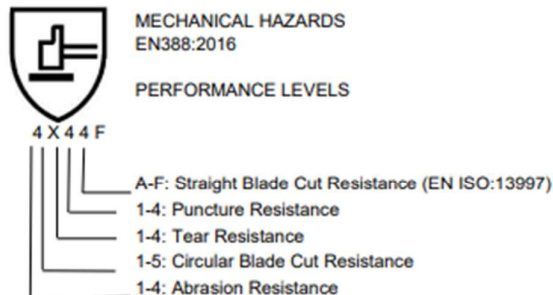

Remark: for cut resisatnt gloves, it is unnecessary to do straight blade cut test if circular blade cut tet is made.
"X" stands for " no test made"

PACKAGE DETAILS

- * Inner Packing: 1 doz/polybag
- * Outer Packing: 10 dozs/carton
- * Carton Size: 56*27*30cm
- * G.W.: 11.5kgs