

Rogue ES 150i/200i PRO


Portable solutions for professional welding



Rogue ES 200i PRO

Industry

- Repair and Maintenance
- Civil Construction
- Agricultural Equipment
- Industrial and General Fabrication

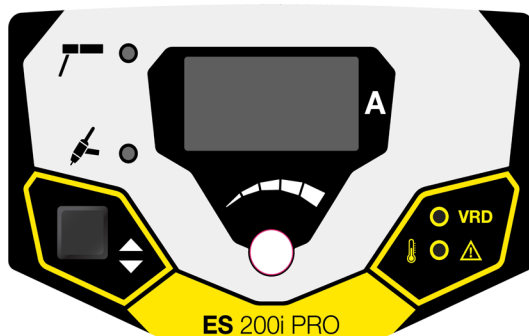

Control panel

The Rogue is a robust and durable power source for the professional welder. The machine provides state-of-the-art welding performance and reliability through use of the latest high performance power electronics and Digital control; ensuring a precise consistent arc. The Rogue provides a smooth DC (Direct Current) welding power which allows you to weld a variety of metals, such as alloyed and non alloyed steel, stainless steel, and cast iron. The Arc Force and Hot Start settings are adjustable and help the user find exactly the right arc for the job. Being digital the Micro-processor precisely controls all functions and provides Best-in Class welding performance across the amperage range of the machine. The Rogue can be used with electrodes up to 4.0mm Ø.

The Rogue can easily perform TIG -welding using a "Lift TIG" start. Equip the power source with the optional TIG-Torch, which has a built-in gas valve and a regulator, and a bottle of gas and you are ready to weld mild steel or stainless steel, with or without filler material.

- Superior Arc characteristics – Smooth, Stable performance.
- Generator Compliant – Suitable for use with generators (recommended 7 kW).
- Easy to Use – Set the welding current and weld with excellent result
- Practical Design - makes the power source easy to carry which enables use at almost any work site
- Robust Design – IP23S Designed for Fabrication Shop or Site application.
- PFC ensures a stable arc, resistant to power fluctuations even while working on long extension cables up to 100 m (PRO version only).

Visit esab.com for more information

Rogue ES 150i/200i PRO

Specifications			
Model	ES 150i		ES 200i PRO
Primary Voltage 1 ph	230 VAC ± 15%, 1ph, 50/60 Hz	115 VAC ± 15%, 1ph, 50/60 Hz	230 VAC ± 15%, 1ph, 50/60 Hz
Maximum Output	150 A	140 A	200 A
Rated kVA	6.9 kVA	4 kVA	6.9 kVA
Energy Save Mode	50 W	50 W	
Open Circuit Voltage	63 V DC	78 V DC	
MMA Welding Output at 25% Duty Cycle at 60% Duty Cycle at 100% Duty Cycle	150 A / 26.0V 97 A / 23.9V 75 A / 23.0V	110 A / 24.4V 70 A / 22.8V 55 A / 22.2V	200 A / 28.0 V 129 A / 25.2V 100 A / 24.0V
TIG Welding Output at 25% Duty Cycle at 60% Duty Cycle at 100% Duty Cycle	150 A / 16.0V 97 A / 13.9V 75 A / 13.0V	140 A / 15.6V 90 A / 13.6V 70 A / 12.8V	200 A / 18.0V 129 A / 15.2V 100 A / 14.0V
Current Range	10 - 150 A	10 - 200 A	
Operating Temperature	-10 to +40 °C	-10 to +40 °C	
Enclosure Class	IP23S	IP23S	
Certification Mark	CE	CE	
Dimensions	403 x 153 x 264 mm	403 x 153 x 264 mm	
Weight	6.8 kg	8.4 kg	

Ordering Information	
Rogue ES 150i CE	0700500076
Rogue ES 200i PRO SEA	0700500087

Delivery includes power source with 3 m mains cable and plug, shoulder strap, electrode holder, 3 m return cable and clamp.

Options & Accessories	
Shoulder strap	0464670003
MMA 4 Analogue Remote Control incl. 10 m cable	0700500084
Electrode holder, Handy 200	0700006003
Electrode holder, Comfort 200	0700006004
Return cable kit, OKC 50, 3 m	0700006903
Return cable kit, OKC 50, 5 m	0700006889
SR-B 17V TIG Torch, OKC 50, 4 m	0700025514
SR-B 26V TIG Torch, OKC 50, 4 m	0700025522
TIG Foot Control, 4.5 m (15 ft.) cable and 8-pin connector	W4014450



ESAB / esab.com

